http://www.ycgenset.com

GENSET MODEL: YP1200G
TECHNICAL DATA SHEET

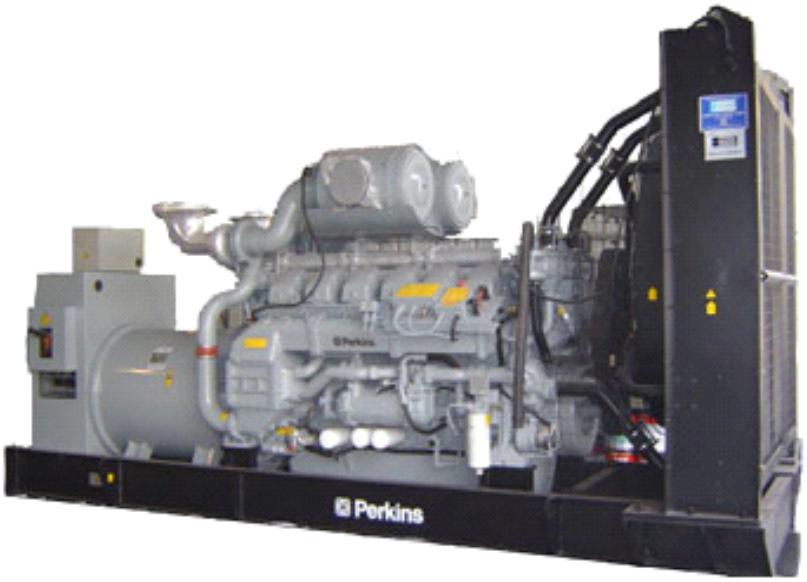

ISO14001:2004

ISO9001:2000

YICHEONG POWER GENERATOR

STANDARD SPECIFICATION

Genset Main Technical Data

3P, 50Hz@1500RPM, 400/230V

(380/220V and 415/240V are for optional)

Genset Model: YP1200G
Engine Model: 4012-46TAG2A

Rated power:

1200 KW 1500 KVA

Standby power:

1320KW 1650 KVA

General Features:

- Composed of Perkins strong powerful diesel engine and Leroy Somer or Marathon alternator.
- 24V DC start motor and storage battery.
- Brushless, Self-excited, IP23, H insulation.
- Engine cooling system: water-cooled.
- Key start panel control system as standard, digital auto-start panel is optional.
- Canopy: Super silent, Normal silent, trailer.
- Optional open type or super silent type, ATS and synchronizing/paralleling system.
- Steel base frame with Anti-Vibration mounting, base fuel tank with flexible rubber fuel lube and level indicator.
- Overall sprayed powder coating.
- All generating sets are gone through rigorous testing before being released to the market place,including 50%, 75%, 100%, 110% load and all protection function(over-speed stop, high water temperature, low oil pressure, battery charging failure, emergency stop).

Benefits:

※ Function stability credibility, service convenient.

※ Low operating cost results in optimal economy.

※ Gets the job done wherever you are.

※ Easy for installation, operation and maintenace.

ASSEMBLY

※ The engine and alternator are close coupled by means of an SAE flange. A full torsional analysis has been carried out to guarantee no harmful vibration will occur. Engine with radiator and alternator are on common spraying powder mounting.

※ Anti-vibration pads are affixed between engine alternator feet and the base frame.Thus ensuring complete vibration isolation of the rotating assemblies and enabling the machine to be placed on an uneven surface without any detrimental effects.

※ For drability and corrosion resistance,all iron and steel surfaces of canopy fabrications have been treated for coating by grit blast cleaning.Then covered by special three layers painting which provides an excellent corrosion resistant surface.

CONTROL SYSTEM AND PROTECTION

※ Controllers are available for all applications.It contains Deep Sea,ComAp or other famous brands. According to their different functions,the control systems can be specified into key start contrller model,automatic start control model and PCRC three remote control systems. See controller features inside.

WARRANTY

※ YICHEONG Company provides one-source responsibility for the generator set and accessories.Each YICHEONG generating set has been got through 2 hours Load test for running 0% ,25%,50%,75%,100% and 110% load,all protective devices and control function are simulated and checked before despatch.

※ Engine and Alternator are guaranted for a period of 12 months from the date of commissioning or 18 months from shipping, whichever occurs first.

※ Convenience for operation and maintenance,backed by Perkins global service network.

CRITERION

※ ISO8528, GB/T2820, ISO3046, BS4999, BS5514, BS500

※ EN12601:2001, EN60034-22:1997, EN60204-1:2006

※ ISO9001:2000, ISO14001:2004, SGS, TLC

YP1200G

ENGINE SPECIFICATION

Engine model **4012-46TAG2A**

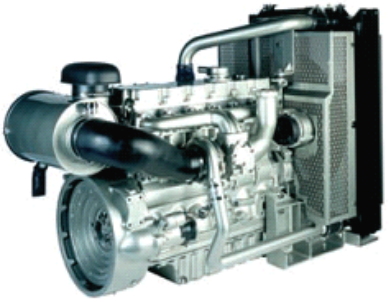

UK Perkins Benefits

Power to Meet your needs: Hitting the key power nodes, provide a clean & cost effective power solution.

State of Art Design: Common-rail fuel system, high power density, low exhaust emissions with the minimum of heat rejection and excellent fuel economy.

World-class Product Support: Network of 4000 distributors and service outlets, easy specify & order part online guides and service tools.

Long-term Power Solution: Designed to fully comply with EU Stage Ⅱ emissions regulations, providing an emissions compliant power solution for the future.

Perkins®

ENGINE BASIC DATA	
NO. of Sylinder & type	12, Vee 60
Air intake way	Turbocharged
Bore*Stroke(mm)	160*190
Cubic Capacity (L)	45.842
BMPE(kpa)	1930.0
Compression ratio	13.1:1
Rated speed(RPM)	1500
Rated power	1331KW/1664KVA
Gross power	1459KW/1824KVA
Piston speed(m/s)	9.5
Engine Coolant flow(L/s)	1020
Air intake flow(L/s)	120
Exhaust flow(L/s)	320
Exhaust temperature (℃)	455
Overall thermal efficiency	39.5%
LUBRICANTION SYSTEM	
Minimum sump capacity(L)	159
Maximum sump capacity(L)	136
Total system oil capacity(L)	177
Normal oil temperature(℃)	95
Min oil pressure at rated speed	400kpa
INDUCTION AIR SYSTEM	
Max. air intake restriction (paper element filter)	
Clean filter	2kPa
Dirty filter	4kPa

EXHAUST SYSTEM	
Max.back of pressure (kPa)	5
Diameter of exhaust pipe (mm)	508
FUEL SYSTEM	
Type of Injection	Direct injection
Injection pressure	23.4MPa
Fuel lift pump pressure	300kPa
Delivery flow	1020l/h
Fuel filter spacing	10 microns
Maximum suction head	2.5m
Maximum pressure head	3m
Governor type of pump	Electrical

CONSUMPTION		
110% (L/h)	1320kw/1650kva	335
100% (L/h)	1200kw/1500kva	301
75% (L/h)	900kw/1125kva	237
50% (L/h)	600kw/725kva	162
25% (L/h)	300kw/375kva	75.2

COOLING SYSTEM	
Coolant capacity (L)	196
Max. top tank temperature	98
Thermostat operation range (℃)	71-85
ELECTRIC SYSTEM	
Alternator	40amp
Starter	14.6kw

YP1200G

ALTERNATOR SPECIFICATION

Reliable performance

Voltage regulation

Voltage regulation maintained with in ±0.5% as follow:

- Power factor between 0.8-1.0 lagging.
- From no load to full load,any steady load.
- Speed droop variation under 5%.

Frequency/Speed undulation

- 0-100% load, Frequency/Speed Droop Ratio <5%.
- 25-100% load, any steady load undulation <0.25%.

Effect factor of telecom

- TIF(MAMG1-22)<50; THF(BS EN60034) < 2%

Brand	LEROY SOMER	STAMFORD
Alternator Model	**LSA50.2 L8**	**PI 734C**
Frequency and Speed	50Hz/1500rpm	50Hz/1500rpm
Voltage(V)	400/230	400/230
Prime Capacity(KVA)	1250	1550
Prime Power(KW)	1000	1240
Power Efficiency(%)	95.4	95.4
Imput Power(KW)	1258	1300
Voltage Regulation	±0.5%	±0.5%
Voltage regolator	AVR	AVR
Rated Power Factor	0.8	0.8
Stator Winding	2/3	2/3
Maximum Overspeed	2250min^{-1}	2250min^{-1}
Sustained Short Circuit	300%(31N):10S	5400Amps
Cooling Air(m^3/s)	1.8	2.69

Alternators meet the requirement of BSEN 60034 and the relevant section of other international standards such as BS5000, VDE0530, NEMA MG1-32, IEC34, CSA22.2-100, As1359, and other standards & certifications can be considered on request.
The 2/3 pitch design avoids excessive neutral currents. With the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.
Brushless alternator with pilot exciter for excellent load response.
Class H insulation, easy parallelling with mains or other generators, standard 2/3 pitch stator windings avoid excessive neutral currents.
Backed by worldwide service network.

DIMENSION AND WEIGHT

Open frame type

Size (L*W*H, mm) 5220×2130×2600

Gross weight: 9720kg



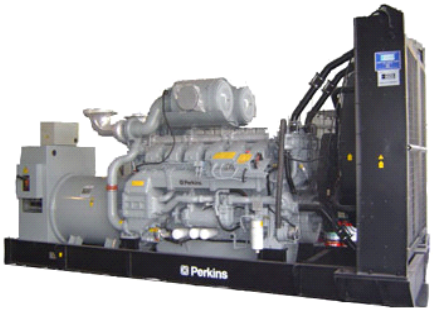

Super silent canopy

Over size (L*W*H, mm) 12192×2438×2896

Gross weight: 17890kg

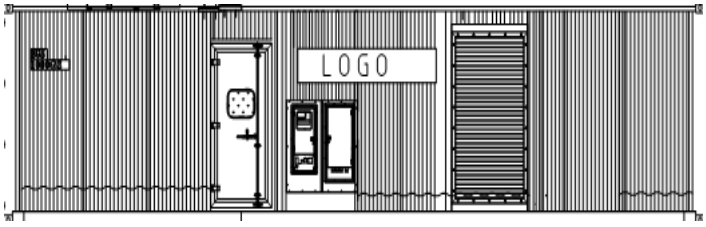

CONTROL SYSTEM

1.Standard: DSE702K Key Start

Providing the standard functions as follows:

(Also can be made according to the customers' special requirements)

※ Start/Stop controller

※ Ampere meter

※ Voltmeter and selector switch

※ Frequency meter/Water temperature gauge/Oil pressure gauge/ Hour counter/Batery voltage meter

※ Emergency stop pushbutton

※ Alarm System: Over speed, High Engine Temperature, Low Oil Pressure, Charge Failure.

※ Protection System: Over speed, High Engine Temperature, Low Oil Pressure, Emergency Stop. And the other protection function presetting.

DSE702K

2.Option:Deep Sea DSE5210 Digital Auto Start

3.Option:Deep Sea DES5220 Digital Auto Start (AMF) (Option assembled with the ATS)

DigitalAuto-start Generator controller integrating digital, intelligent and network techniques is used for automatic control system of diesel generator. It can carry out functions including automatic start/stop, data measure and alarming. Optionally assembled with the ATS, it can carry out auto-switching between the outer power and generating set power.(AMF)

DSE5210

DSE5220

Functions:

※ Automatic Start/Stop

※ 3 start attempts failure and Automatic Crank Disconnect

※ Parameters display(V/A/Hz/Hour)

※ Engine monitoring and protection

※ Charge alternator exciting and Charge alternator fail alarm

※ Running hour counting

※ Settings can be adjustable via key buttons on front panel

Shutdown:

※ Loss of Speed Signal

※ Alternator Under/Over Voltage

※ Alternator Under/Over Frequency

※ Mains Under/Over Voltage

※ Mains Under/Over Frequency

※ Under/Over Speed

※ Low Oil Pressure

※ High Engine Temperature

Warning:

※ Alternator Under/Over Voltage

※ Alternator Under/Over Frequency

※ Mains Under/Over Voltage

※ Mains Under/Over Frequency

※ Under/Over Speed

※ Low Oil Pressure Pre-Alarm

※ High Engine Temp. Pre-Alarm

※ High/Low Battery Voltage

※ Over-current

※ Periodic maintenance

YP1200G

Optional Parts:

Engine	Alternator	Generator Set	Fuel System	Canony
• Heater 2KW&4KW (Coolant & Lube Oil) • Battery Charger 3.5A & 7A	• AVR PMG with regulator • Anti-damp and anti-corrosion treatment • Anti-condensation heater	• Tools with the machine	• Low fuel level alarm • Automatic fuel feeding system	• Super silent (65-68Dba@7m) • Normal silent (75-78Dba@7m)
Lubricating System	**Exhaust Gas System**	**Cooling System**	**Control Panel**	**Output Voltage**
•Oil with the machine	• Protection board from hotness • Low frequency silencer	• Front heat protection • 50℃ radiator • Coolant(-30℃)	• Remote controller • Auto-paralleling control panel • Auto Transfer /changeover Switch (ATS)	• 440/254V • 416/240V • 220/127V • 208/120V

Circuit Breaker

Paralleling/synchronizing System

ATS

Super silent canopy

Shenzhen Yicheong Jichai Power Co., Limited
Add: RunXun Industrial Park, HuanGuan Middle Rd.,
GuanLan, Bao'An Dist, Shenzhen, China
Tel: 0086-755-27638427 Fax: 0086-755-27638460
Email: info@ycgenset.com