



**Yicheong Jichai Power Co.,Ltd.**

<http://www.ycgenset.com>

GENSET MODEL:YC300G  
TECHNICAL DATE SHEET



ISO14001:2004



ISO9001:2000

**YICHEONG POWER GENERATOR**

# YC300G

## STANDARD SPECIFICATION

### General Features:

- Composed of YUCHAI diesel engine and Stamford or Leroy Somer alternator
- 24V DC start motor and storage battery
- Brushless, Self-excited, IP23, insulation class H alternator
- Engine cooling system:water-cooled
- Key start panel control system as standard,digital auto-start panel is optional
- 10-hour operation base tank
- Optional open type or silent type
- All generating sets are gone through rigorous testing before being released to the market place,including 50% load, 75% load, 100% load, 110% load and all protection function(over-speed stop, high water temperature, low oil pressure, battery charging failure, emergency stop)



### Genset Main Technical Data

**3P,50Hz@1500RPM,400/230V (380/220V and 415/240V are for optional)**

Genset Model	Genset Specification				Cons. 100% (g/kW.h)	Engine Specification		Alternator Model Marathon /Engga
	Rated Power		Standby Power			Engine Model	Governor Type	
	KW	KVA	KW	KVA				
YC300G	300	375	330	412.5	≤225	YC6T500L-D20	Electronical	MP-300-4/EG315M-300N

### ASSEMBLY

※ The engine and alternator are close coupled by means of an SAE flange.A full torsional analysis has been carried out to guarantee no harmful vibration will occur.

※ Anti-vibration pads are affixed between engine alternator feet and the base frame.Thus ensuring complete vibration isolation of the rotating assemblies and enabling the machine to be placed on an uneven surface without any detrimental effects.

※ For drability and corrosion resistance,all iron and steel surfaces of canopy fabrications have been treated for coating by grit blast cleaning.Then covered by special three layers painting which provides an excellent corrosion resistant surface.

### CONTROL SYSTEM AND PROTECTION

※ Controllers are available for all applications.It contains Deep Sea,Delf,ComAp or other famous brands.According to their different functions,the control systems can be specified into key start contrller model,automatic start control model and PCRC three remote control systems.See controller features inside.

### WARRANTY

※ YICHEONG Company provides one-source responsibility for the generator set and accessories.Each YICHEONG generating set has been got through 2 hours Load test for running 0% ,25%,50%,75%,100% and 110% load,all protective devices and control function are simulated and checked before despatch.

※ Engine and Alternator are guaranted for a period of 12 months from the date of commissioning or 18 months from shipping,whichever occurs first.

※ Convenience for operation and maintenance,backed by YUCHAI global service network.

## Reliable Performance

### Voltage regulation

Voltage regulation maintained with in  $\pm 0.5\%$  as follow:

- Power factor between 0.8-1.0 lagging
- From no load to full load, any steady load
- Speed droop variation under 5%

### Frequency/Speed undulation

- Change load from 0-100%, Frequency/Speed Droop Ratio within 5%
- Load from 25-100%, any steady load Frequency/Speed undulation with in 0.25%

Effect factor of telecom

- TIF(MAMG1-22) better than 50
- THF(BS EN60034) better than 2%

## Engine Features

Compact Engine, light weight, strong power, long time service

## Criterion


- ISO8528, GB/T2820, ISO3046, BS4999, BS5514, BS5000
- EN12601:2001, EN60034-22:1997, EN60204-1:2006
- ISO9001:2000 Quality Management System & iso14001:2004, SGS, TL

## Dimension and Weight

### Open Type

Overall size (L\*W\*H)  
3450 x 1500 x 1800


**Weight: 3600kg**

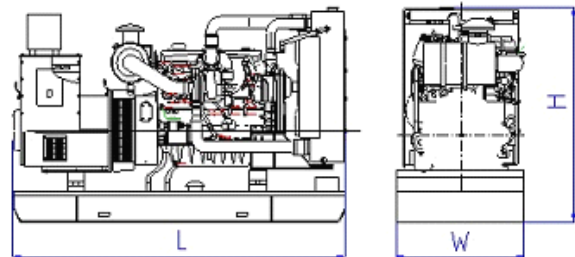

### Super Silent Type

Overall size (L\*W\*H)  
4100 x 1620 x 2200

**Weight: 4300kg**

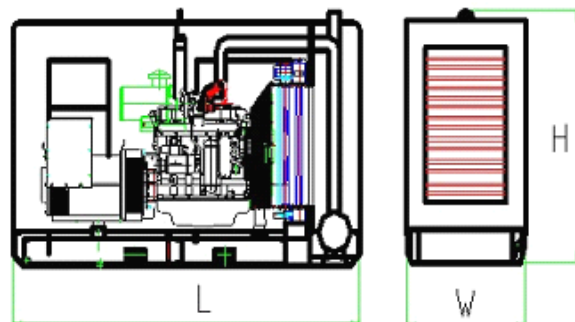

## YC300G

# ENGINE SPECIFICATION

Features:

Engine Model	YC6T500L-D20		
Number of Cylinders	6		
Cylinder Arrangement	Vertical in-line		
Cycle	4 stroke		
Aspiration	Turbocharged,aftercooled		
Bore x Stroke(mm x mm)	145 x 165		
Displacement(Liter)	16.35		
Prime Power/Speed (kW/rpm)	368/ 1500		
Standby Power/Speed(kW/rpm)	400/ 1500		
Speed Governor	Mechanical		
Cooling System	Water-cooled		
Speed Stability(%)	≤5%		
Fuel Consumption at 1500RPM			
	110%	330KW/412.5KVA	247. 5g/kW. h
	100%	300KW/375KVA	225g/kW. h
	75%	225KW/281KVA	168. 7g/kW. h
	50%	150KW/187.5KVA	112. 5g/kW. h
	25%	75KW/94KVA	56. 5g/kW. h
Starter Motor	24V		

# ALTERNATOR SPECIFICATION

Brand	Marathon	Engga	
Alternator Model	MP-300-4	EG315M-300N	<p>Alternators meet the requirement of BSEN 60034 and the relevant section of other international standards such as BS5000, VDE0530, NEMA MG1-32, IEC34, CSA22.2-100, As1359, and other standards and certifications can be considered on request.</p> <p>The 2/3 pitch design avoids excessive neutral currents. With the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.</p> <p>Brushless alternator with brushless pilot exciter for excellent load response. Class H insulation, easy parallelling with mains or other generators, standard 2/3 pitch stator windings avoid excessive neutral currents.</p>
Frequency and Speed	50Hz/1500rpm	50Hz/1500rpm	
Voltage(V)	400/230	400/230	
Prime Capacity(KVA)	375	375	
Prime Power(KW)	300	300	
Power Efficiency(%)	93	93. 4	
Input Power(KW)	322.6	322	
Voltage Regulation	±0.5%	±0.5%	
Voltage regulator	AVR	AVR	
Rated Power Factor	0.8	0.8	
Stator Winding	2/3	2/3	
Maximum Overspeed	1875min <sup>-1</sup>	1875min <sup>-1</sup>	

# CONTROL SYSTEM

## 1. Standard: HGM170HC Key Start

Providing the standard functions as follows:

(Also can be made according to the customers' special requirements)

- ※ Start/Stop controller
- ※ Ampere meter
- ※ Voltmeter and selector switch
- ※ Frequency meter/Water temperature gauge/Oil pressure gauge/ Hour counter/Battery voltage meter
- ※ Emergency stop pushbutton
- ※ Alarm System: Over speed, High Engine Temperature, Low Oil Pressure, Charge Failure
- ※ Protection System: Over speed, High Engine Temperature, Low Oil Pressure, Emergency Stop. And the other protection function presetting

## 2. Option: Deep Sea DSE5210 Digital Auto Start

## 3. Option: Deep Sea DES5220 Digital Auto Start (AMF) (Option assembled with the ATS)

Digital Auto-start Generator controller integrating digital, intelligent and network techniques is used for automatic control system of diesel generator. It can carry out functions including automatic start/stop, data measure and alarming. Optionally assembled with the ATS, it can carry out auto-switching between the outer power and generating set

### Functions:

- ※ Automatic Start/Stop
- ※ 3 start attempts failure and Automatic Crank Disconnect
- ※ Parameters display (V/A/Hz/Hour)
- ※ Engine monitoring and protection
- ※ Charge alternator exciting and Charge alternator fail alarm
- ※ Running hour counting
- ※ Settings can be adjustable via key buttons on front panel

### Shutdown:

- ※ Loss of Speed Signal
- ※ Alternator Under/Over Voltage
- ※ Alternator Under/Over Frequency
- ※ Mains Under/Over Voltage
- ※ Mains Under/Over Frequency
- ※ Under/Over Speed
- ※ Low Oil Pressure
- ※ High Engine Temperature



HGM170HC



DSE5210



DSE5220

### Warning:

- ※ Alternator Under/Over Voltage
- ※ Alternator Under/Over Frequency
- ※ Mains Under/Over Voltage
- ※ Mains Under/Over Frequency
- ※ Under/Over Speed
- ※ Low Oil Pressure Pre-Alarm
- ※ High Engine Temp. Pre-Alarm
- ※ High/Low Battery Voltage
- ※ Over-current
- ※ Periodic maintenance



# YC300G

## Optional Parts:

Engine	Alternator	Generator Set	Fuel System	Canony
<ul style="list-style-type: none"> <li>• Coolant heater</li> <li>• Lubricant Oil heater</li> </ul>	<ul style="list-style-type: none"> <li>• Space heater</li> <li>• AVR PMG with regulator</li> <li>• Anti-damp and anti-corrosion treatment</li> <li>• Anti-condensation heater</li> </ul>	<ul style="list-style-type: none"> <li>• Tools with the machine</li> </ul>	<ul style="list-style-type: none"> <li>• Low fuel level alarm</li> <li>• Automatic fuel feeding system</li> </ul>	<ul style="list-style-type: none"> <li>• Super silent (65-68Db@7m)</li> <li>• Normal silent (75-78Db@7m)</li> </ul>
Lubricating System	Exhaust Gas System	Cooling System	Control Panel	Output Voltage
<ul style="list-style-type: none"> <li>• Oil with the machine</li> </ul>	<ul style="list-style-type: none"> <li>• Protection board from hotness</li> <li>• Low frequency silencer</li> </ul>	<ul style="list-style-type: none"> <li>• Front heat protection</li> <li>• 50°C radiator</li> <li>• Coolant(-30°C)</li> </ul>	<ul style="list-style-type: none"> <li>• Remote controller</li> <li>• Automatic paralleling control panel</li> <li>• Automatic Transfer/changeover Switch (ATS)</li> </ul>	<ul style="list-style-type: none"> <li>• 440/254V</li> <li>• 416/240V</li> <li>• 220/127V</li> <li>• 208/120V</li> </ul>



Circuit Breaker



Paralleling/synchronizing System



ATS



Super silent canopy

Shenzhen Yicheong Jichai Power Co., Limited

Add: RunXun Industrial Park, HuanGuan Middle Rd.,

GuanLan, Bao'An Dist, Shenzhen, China

Tel: 0086-755-27638427 Fax: 0086-755-27638460

Email: [info@ycgenset.com](mailto:info@ycgenset.com)